

技术参数：


频率范围 (-3dB) :	50Hz~18kHz
频率范围 (-10dB) :	35Hz~20kHz
频率范围 (+3/-6dB) :	40Hz~20kHz
额定阻抗 :	LF:8 ohm/MF:8ohm/HF:8ohm
功率 :	LF:800W/MF:300W/HF:300W
灵敏度 (1W@1M) :	LF:98dB/MF:99dB/HF:101dB
峰值声压级1 :	139dB
覆盖角 :	水平: 120° 垂直: 45°
外形尺寸 (HxWxD) :	LF:650x430x320mm(x2) MF:734x130x152mm HF:754x130x152mm
净重 :	LF:27.5kg(x2)/MF:7.0kg/HF:8.0kg
	可分拆式安装



1: 使用12dB峰值因子粉噪信号测试得到, 半自由场。

覆盖角度：

Horizontal 1/3 Octave Polars

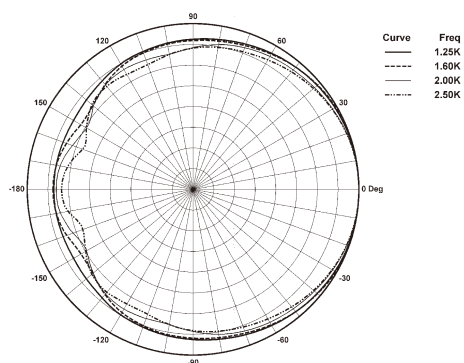

Vertical 1/3 Octave Polars

