



# PRA246/246V

**PRA** 演出系列  
恒定指向性阵列音箱

## 技术参数:

单元: 6 x 100 mm (4 inch) EMX单元

频率范围 (-10dB): 60 Hz ~ 20 kHz

额定阻抗: 4 ohm

功率: 250W/500W/1000W (连续/节目/峰值)

灵敏度(1W@1M): 97 dB

峰值声压级<sup>1</sup>: 133dB

覆盖角: 水平:120° 垂直:30°

音箱材质: 全金属复合材料

可选: PRA246V (定压)

PRA246P (有源)

PRA246WP (防水等级IP56)

变压器档位: 70V: 100W,50W,25W,12.5W

100V: 100W,50W,25W

颜色: 黑 色:PRA246

白 色:PRA246/W

深灰色:PRA246/G


外形尺寸(HxWxD): 763x 123 x 164.5mm

863x 123 x 164.5mm (定压)

净重: 8.9kg/10.7kg (定压)



## 频率响应曲线:

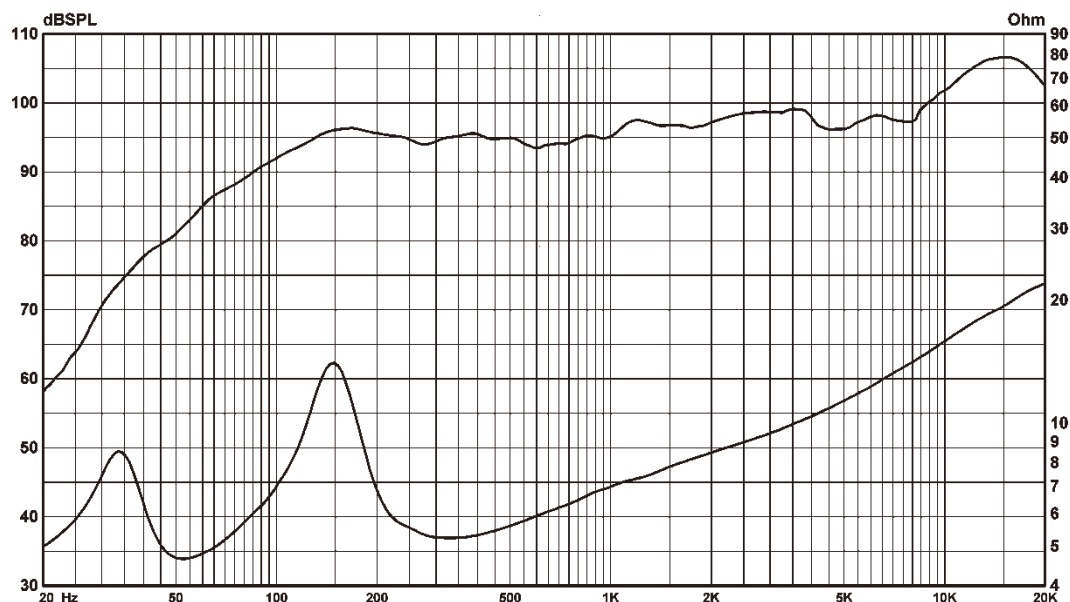

1. 使用12dB峰值因子粉噪信号测试得到, 半自由场。




# PRA246/246V




**PRA** 演出系列  
恒定指向性阵列音箱

## 覆盖角度:

Horizontal 1/3 Octave Polars

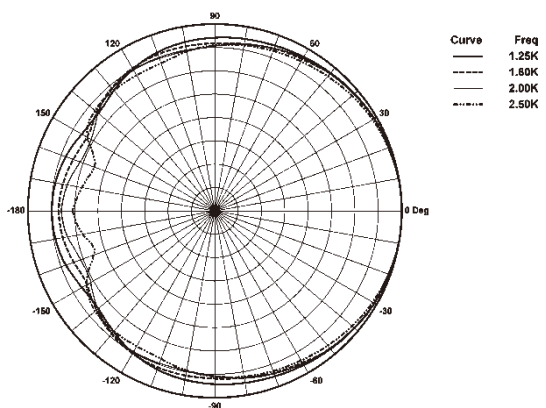

Vertical 1/3 Octave Polars

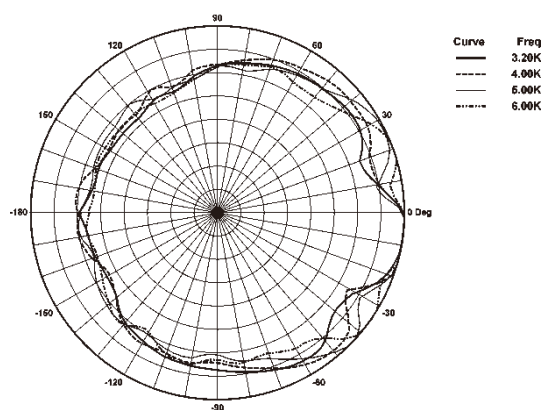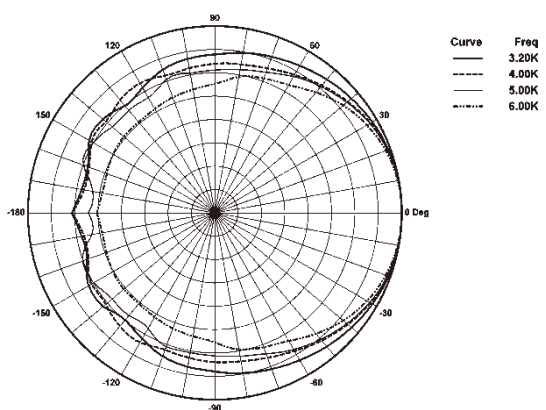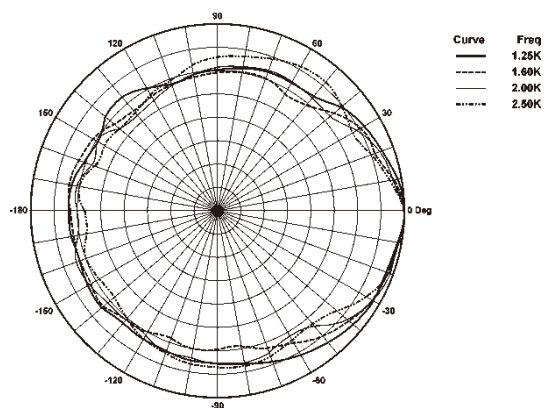

## 产品尺寸:

